

DEIMOS ULTRA BT KIT A600 FRA

Bft



Use: Residential
Max leaf: 600kg



24 V



er ready



d-track



ee link



u-link

Description

- Complete kit 24V for sliding gates up to 600kg in weight. Leaf speed 12m/min. Limit switch magnetic



DEIMOS ULTRA BT KIT A600 FRA R925269 00002

The KIT includes

1 - DEIMOS ULTRA BT A600	Operator 24V for sliding gates up to 600kg in weight. Leaf speed 12m/min. Limit switch magnetic.
2 - MITTO B RCBO4 R1	12V four-channel transmitter 433MHz rolling code
1 - RADIUS B LTA 24 R1	Flashing beacon with built-in antenna for 24V motors
1 - CELLULA 130	Pair of self-aligning photocells for external application (range 30 m) Power supply 24V ac/dc

Complementary accessories


Code	Name	Description
D221073	CP	Plastic rack, 4-module, cross-section 22 x 22 mm, length 1 m, screw-fitted into slots
P111273	CELLULA 130	Pair of CELLULA130 photocells
P903005	CC130	Pair of CC 130 posts
N999629	MITTO B RCBO4 R6 RAINBOW	MITTO B RCBO4 R6 RAINBOW
P125033	SL BATI	SL BATI emergency battery kit for DEIMOS ULTRA BT

MERAK



MERAK

- Application: control unit for 1 24V operator for sliding gates
- Board power supply: 230V single-phase
- Operator power supply: 24V 80W
- Main characteristics: removable terminal boards with the new colour standard, simplified programming with scenario display, integrated two-channel receiver, D-Track based antisquashing system and slowdown during opening or closing.
- Main functions: automatic closing, quick closing, pedestrian passage, people-present operation, maintenance warnings.
- Compatibility: HQSC-D, QSC-D MA

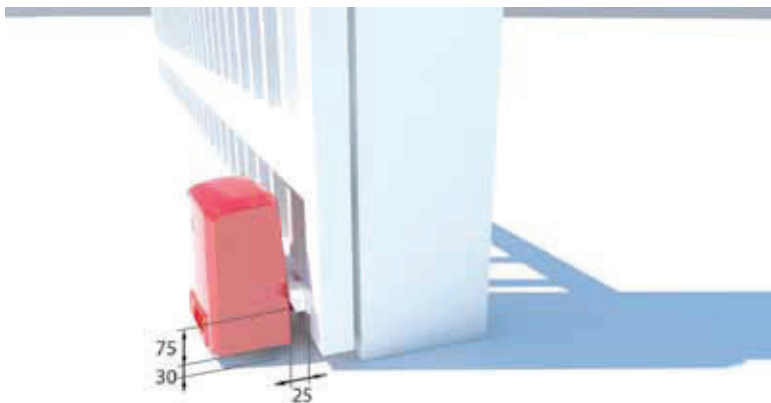

	DEIMOS ULTRA BT KIT A600 FRA
Control unit	MERAK SL2
Power supply	24V
Power input	70W
Type of limit switch	magnetic
Pinion module	4
Slowdown	yes
Impact reaction	d-track
Locking	mechanical
Release	lever-operated with personal key
Frequency of use	intensive
Environmental conditions	from -20°C to 55°C
Actuator weight	8kg